KERN **CCS 60K0.01L.**

Counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999

Date of creation: 19.06.2026

Category	
Brand	KERN
Product category	Industrial scale
Product group	Counting system
Product family	CCS

Measuring System	
Weighing system	Strain gauge
Reference scale - Weighing capacity [Max]	3 kg
Reproducibility	0,00002 kg
Linearity	±
Adjustment options	Adjusting with external weight
Recommended adjusting weight	50 kg (M1)
Quantity scale - Item number	TKFP 60V20LM-A
Stabilization time	2 s
Eccentric loading at 1/3 [Max]	0,00005 kg
Reference scale - Eccentric loading at 1/3 [Max]	60 mg
Quantity scale - Linearity	0,008 kg
Quantity scale - Eccentric loading at 1/3 [Max]	0,01 kg
Quantity scale - Reproducibility	0,002 kg
Reference scale - Reproducibility	30 mg
Reference scale - item number	CFS 3K-5
Reference scale - Linearity	100 mg
Construction type of the scale	Multi-range balance
Units	kg lb
Default unit	kg
Loadcell type	HBM PW6KRC3
Quantity scale - Readability [d]	0,002 kg
Quantity scale - Weighing capacity [Max]	60 kg
Reference scale - Readability [d]	10 mg

Display	
Display type	LCD
Display backlight	✓
Display digit height	20 mm

Construction	
Dimensions completely mounted (W×D×H)	320×330×125 mm
Dimensions weighing surface (W×D)	500×400 mm
Dimensions weighing surface	500×400 mm
Dimensions weighing platform (W×D×H)	500×400×124 mm
Material housing	plastic
Material weighing plate	stainless steel
Level indicator	✓
Levelling feet adjustable	✓
Cable length	1,5 m
Display device cable length	3 m

Functions	
PreTare function	✓
Sum memory function	✓
Recipe/summing level	Sum A
Conversion function	✓
PLU - total	100
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	None
Counting function	✓
Counting resolution (laboratory conditions)	1.200.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	50 mg
Smallest piece weight when piece counting - normal conditions	500 mg
Reference quantity	n (any number of pieces)
IP protection - display	IP23
IP protection - platform	IP65
IP protection - load cell	IP65
Memory function	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	selectable
Tare function	manual (multi)
Number of keys for operation	20

KERN **CCS 60K0.01L.**

Counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999

Interface

Interfaces	RS-232 standard

Power Supply

Supplied power supply	Power supply unit
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
Power supply – Cable length	180 cm
Input voltage power supply / power [Max]	220 V - 240 V AC, 50 Hz
Input voltage device / power [Max]	12 V, 500 mA
Power socket for mains adapter	Inside plus, outside minus
Rechargeable battery	GAB-A04
Rechargeable battery operating time - backlight on	70 h
Rechargeable battery operating time - backlight off	60 h
Rechargeable battery charging time	12 h
Rechargeable battery optional	Rchrg. battery optional

Environmental conditions

Ambient temperature [Min]	0 °C
Ambient temperature [Max]	40 °C
Humity of environment [Min]	0 %
Humity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓

Services (optional)

Article number for adjustment at the location of installation	abhängig von Auflösung/ Max | depends on resolution and capacity
Article number for DAkkS calibration	962-129-127
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	2 d
Dimensions packaging (W×D×H)	1040×640×230 mm
Shipping method	Parcel service
Net weight approx.	16 kg
Gross weight approx.	19 kg
Shipping weight	30,6 kg
Shipping volume weight	30,6 kg

Product information

GTIN/EAN number	4045761180123
Trade number	84238220
REACH classification	no prohibited substances

Pictograms

STANDARD

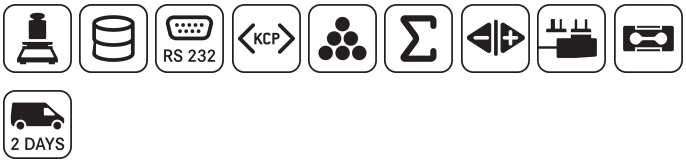

OPTION